




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification :  Not classified		A2	(11) International Publication Number: <b>WO 00/41510</b>
			(43) International Publication Date: 20 July 2000 (20.07.00)
(21) International Application Number: PCT/US00/01052		(74) Agents: BAILEY, Wayne, P. et al.; Storage Technology Corporation, One StorageTek Drive, MS-4309, Louisville, CO 80028-4309 (US).	
(22) International Filing Date: 14 January 2000 (14.01.00)			
(30) Priority Data: 09/232,431 15 January 1999 (15.01.99) US		(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(71) Applicant: STORAGE TECHNOLOGY CORPORATION [US:US], One StorageTek Drive, MS-4309, Louisville, CO 80028-4309 (US).		<b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>	
(72) Inventors: BAKKE, Mark, Alan; 11738 Gentilly Road, Maple Grove, MN 55369 (US). BLENDERMANN, Stephen, Henry; 1489 Johnson Court, Boulder, CO 80303 (US). HALLADAY, Steven; 1049 Monarch Way, Superior, CO 80027 (US). JOHNSON, Steven, A.; 5678 West 109th Circle, Westminster, CO 80020 (US). LAUGHLIN, Jeffrey, Steven; 315 Forsythe Road- MSR, Nederland, CO 80466 (US). RUDESEAL, George, Arthur; 650 12th Street, Boulder, CO 80302 (US). SCHAFER, Charles, Patrick; 125 Skyview Court, Louisville, CO 80027 (US). WEST, Thomas, David; 990 Parkway Drive, Boulder, CO 80303-2850 (US). WOJNAR, Michael, C.; 2528 Ginny Way, Lafayette, CO 80026 (US).			

(54) Title: INTELLIGENT DATA STORAGE MANAGER

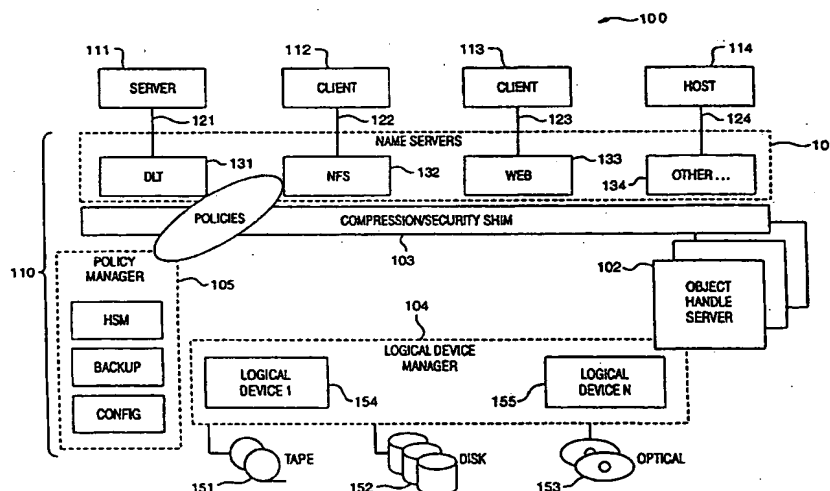

## (57) Abstract

The intelligent data storage manager functions to combine the non-homogeneous physical devices contained in a data storage subsystem to create a logical device with new and unique quality of service characteristics that satisfy the criteria for the policies appropriate for the present data object. In particular, if there is presently no logical device that is appropriate for use in storing the present data object, the intelligent data storage manager defines a new logical device using existing physical and/or logical device definitions as component building blocks to provide the appropriate characteristics to satisfy the policy requirements. The intelligent data storage manager uses weighted values that are assigned to each of the presently defined logical devices to produce a best fit solution to the requested policies in an n-dimensional best fit matching algorithm. The resulting logical device definition is then implemented by dynamically interconnecting the logical devices that were used as the components of the newly defined logical device to store the data object.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## INTELLIGENT DATA STORAGE MANAGER

### Field of the Invention

This invention relates to data storage subsystems and, in particular, to a dynamically mapped virtual data storage subsystem which includes a data storage manager that functions to combine the non-homogeneous physical devices contained in the data storage subsystem to create a logical device with new and  
5 unique quality of service characteristics that satisfy the criteria for the policies appropriate for the present data object.

### Problem

It is a problem in the field of data storage subsystems to store the ever increasing volume of application data in an efficient manner, especially in view of  
10 the rapid changes in data storage characteristics of the data storage elements that are used to implement the data storage subsystem and the increasingly specific need of the applications that generate the data.

Data storage subsystems traditionally comprised homogeneous collections of data storage elements on which the application data was stored for a plurality  
15 of host processors. As the data storage technology changed and a multitude of different types of data storage elements became available, the data storage subsystem changed to comprise subsets of homogeneous collections of data storage elements, so that the application data could be stored on the most appropriate one of the plurality of subsets of data storage elements. Data storage  
20 management systems were developed to route the application data to a selected subset of data storage elements and a significant amount of processing was devoted to ascertaining the proper data storage destination for a particular data set in terms of the data storage characteristics of the selected subset of data storage elements. Some systems also migrate data through a hierarchy of data storage  
25 elements to account for the timewise variation in the data storage needs of the data sets.

In these data storage subsystems, the quality of service characteristics are determined by the unmodified physical attributes of the data storage elements that are used to populate the data storage subsystem. One exception to this rule is  
30 disclosed in U.S. Patent No. 5,430,855 titled "Disk Drive Array Memory System Using Nonuniform Disk Drives," which discloses a data storage subsystem that

uses an array of data storage elements that vary in their data storage characteristics and/or data storage capacity. The data storage manager in this data storage subsystem automatically compensates for any nonuniformity among the disk drives by selecting a set of physical characteristics that define a common data storage element format. However, the data storage utilization of the redundancy groups formed by the data storage manager is less than optimal, since the least common denominator data storage characteristics of the set of disk drives is used as the common disk format. Thus, disk drive whose data storage capacity far exceeds the smallest capacity disk drive in the redundancy group suffers from loss of utilization of its excess data storage capacity. Therefore, most data storage subsystems do not utilize this concept and simply configure multiple redundancy groups, with each redundancy group comprising a homogeneous set of disk drives. A problem with such an approach is that the data storage capacity of the data storage subsystem must increase by the addition of an entire redundancy group. Furthermore, the replacement of a failed disk drive requires the use of a disk drive that matches the characteristics of the remaining disk drives in the redundancy group, unless loss of the excess data storage capacity of the newly added disk drive were incurred, as noted above.

Thus, it is a prevalent problem in data storage subsystems that the introduction of new technology is costly and typically must occur in fairly large increments, occasioned by the need for the data storage subsystem to be comprised of homogeneous subset of data storage devices, even in a virtual data storage subsystem. Therefore, data administrators find it difficult to cost effectively manage the increasing volume of data that is being generated in order to meet the needs of the end users' business. In addition, the rate of technological innovation is accelerating, especially in the area of increases in data storage capacity and the task of incrementally integrating these new solutions into existing data storage subsystems is difficult to achieve.

### Solution

The above described problems are solved and a technical advance achieved by the present intelligent data storage manager that functions to combine the non-homogeneous physical devices contained in a data storage subsystem to create a logical device with new and unique quality of service characteristics that

satisfy the criteria for the policies appropriate for the present data object. In particular, if there is presently no logical device that is appropriate for use in storing the present data object, the intelligent data storage manager defines a new logical device using existing physical and/or logical device definitions as component building blocks to provide the appropriate characteristics to satisfy the policy requirements. The intelligent data storage manager uses weighted values that are assigned to each of the presently defined logical devices to produce a best fit solution to the requested policies in an n-dimensional best fit matching algorithm. The resulting logical device definition is then implemented by dynamically interconnecting the logical devices that were used as the components of the newly defined logical device to store the data object.

### **Brief Description of the Drawing**

Figure 1 illustrates in block diagram form the overall architecture of a data storage subsystem in which the present intelligent data storage manager is implemented;

Figure 2 illustrates a three-dimensional chart of the operating environment of the present intelligent data storage manager;

Figure 3 illustrates one example of a virtual device that can be configured by the present intelligent data storage manager; and

Figure 4 illustrates a three-dimensional chart of a user policy that must resolve priorities between two attributes: Cost per MB, and Time to First Byte.

### **Detailed Description**

Figure 1 illustrates in block diagram form the overall architecture of a data storage subsystem 100 in which the present intelligent data storage manager 110 is implemented. The data storage subsystem is connected to a plurality of host processors 111-114 by means of a number of standard data channels 121-124. The data channels 121-124 are terminated in a host interface 101 which provides a layer of name servers 131-134 to present virtual implementations of existing defined physical device interfaces to the host processors 111-114. As far as the host processors 111-114 are concerned, the name servers 131-134 implement a real physical device. The name servers 131-134 convert the user data received from the host processor 111-114 into a user data object which can be either converted into a canonical format or left in binary format. The object handle server

maps the object handle to logical device addresses and allows multiple instances of a data object. The object handle server 102 maps the user data object into a data space for storage. The mapping is determined by the policies programmed into the policy manager 105 of the data storage subsystem 100 and subject to security layer 103. The persistent storage for the object space is determined by the logical device manager 104 which allocates or creates a logical device based upon policies for storing the user data object. A logical device is a composite device and can consist of a real physical device such as a tape 151, a disk 152, optical disk 153, another logical device, such as Logical Device 1 which comprises a RAID 5 disk array 154, Logical Device N which comprises middleware software 155 that accesses another logical device, such as access of a logical device over a network connection, or combinations of the above. The logical device definition abstracts the nature of the real device associated with the persistent storage. The changes implemented in the technology of the persistent storage are thereby rendered transparent to the host application.

If there is presently no logical device that satisfies the criteria for the policies appropriate for a user data object, the logical device manager 104 creates a new logical device definition with the appropriate data storage characteristics to satisfy the policy requirements using existing physical and/or logical device definitions as component building blocks. The logical device manager 104 uses weighted values that are assigned to each of the presently defined logical devices to produce a best fit solution to the requested policies in an n-dimensional best fit matching algorithm. Thus, the intelligent data storage manager 110 maps the virtual device to the user data object rather than mapping a data object to a predefined data storage device. The various data storage attributes that are used by the intelligent data storage manager 110 to evaluate the appropriateness of a particular virtual device include, but are not limited to: speed of access to first byte, level of reliability, cost of storage, probability of recall, and expected data transfer rate. The logical device manager 104 stores the mapping data which comprises a real time definition of the available storage space in the data storage subsystem 100. Once one of the current logical device definitions meet the criteria required by a data object, the logical device manager 104 either allocates space on an existing instance of a logical device of that type or creates a new instance of that type of logical device.

### Policy Attributes

The policy attributes and the potential algorithms that are used to map user requirements to storage devices are managed by the intelligent storage manager 110. A typical general set of attributes for storage devices is shown in Table 1:

5

**Table 1: Policy Attributes**

	<b>Name of Attribute</b>	<b>Range of Values (Dimension)</b>
	Cost per MB (lg)	\$0.0001 to \$1000.00
	Time to first byte (lg)	Ns to days
	Random read	0.0001 to 1000 MB/sec
10	Random write	0.0001 to 1000 MB/sec
	Sequential read	0.0001 to 1000 MB/sec
	Sequential write	0.0001 to 1000 MB/sec
	Sequential (tape) or random (disk) storage or recall	0 to 10 (where: 0= sequential, 10= random)
15	Size (lg)	Bytes to petabytes
	Probability of recall	0 to 10 (where: 0= lowest, 10= highest)
	Virtual or real Device	yes/no
	Level of reliability	0 to 10 (where: 0= minimum, 10= 100%)
20	Others to be defined...	

20

Each of these attributes has a range or dimension of "values". Each dimension needs to be relatively uniform in its number scheme. For example, each dimension could have a numeric value for 0.0 to 10.0. Some dimensions need to be logarithmic (lg) because of the inherent nature of the dimension. For example,

25 Cost per MB can be defined as a logarithmic dimension that runs from the \$0.001 for tape storage to \$10s for RAM. So one approach is to do a distance calculation of the difference between the customer's policy requirements and each storage device's policy attributes. In addition, levels of priority among attributes can be specified since certain dimensions may be more important than others (reliability,

30 for example). When the intelligent storage manager 110 must resolve between conflicting priority levels, the logical storage manager 104 tries to find ways to combine single devices into an optimal, logical device using logical combining

operators.

### Operation of the Intelligent Data Storage Manager

The present intelligent data storage manager 110 is responsive to one of the host processors 111 initiating a data write operation by transmitting a predefined set of commands over a selected one of the communication links to the data storage subsystem 100. These commands include a definition of the desired device on which the present data object is to be stored, typically in terms of a set of data storage characteristics. Figure 2 illustrates a three-dimensional (of the above-noted multiple dimensions) chart of the operating environment of the present intelligent data storage manager 110 and the location of the host specified data storage device with respect to this environment. In particular, as mapped in a Cartesian coordinate system, the cost, data transfer rate, and data access time comprise the three axes used to measure the performance characteristics of the various physical 151-153 and virtual 154-155 devices of the data storage subsystem 100. As shown in Figure 3, the standard tape 151, disk 152, and optical 153 devices each have a set of defined characteristics that can be mapped to the three-dimensional space of Figure 2. The user has requested that their data be stored on a device, whose data storage characteristics do not match the data storage characteristics of any of the devices presently defined in the data storage subsystem 100. The desired data storage characteristics are shown mapped as a locus in the three-dimensional space in Figure 2. The intelligent data storage manager 110 must therefore map the existing set of physical devices that are contained in the data storage subsystem 100 to satisfy the desired set of data storage characteristics defined by the user. This problem comprises a three-dimensional best fit mapping process wherein the set of available physical and virtual devices are mapped to match or at least approximate the desired set of data storage characteristics. This is accomplished by creating a composite virtual device that implements the defined desired data storage characteristics. For example, assume that the user has requested a data storage device that has a 20MB/sec read performance and the data storage subsystem 100 is equipped with 5MB/sec tape drives as one of the types of physical devices. The intelligent data storage manager 110 can create a 20MB/sec data storage device by configuring a Redundant Array of Inexpensive Tape drives (RAIT) to connect a plurality of the



existing tape drives 151 in parallel to thereby achieve the desired data throughput.

### Examples of Operation of the Intelligent Data Storage Manager

There are many instances of data file storage where the needs of the application and/or user do not correspond to the reality of the data storage characteristics of the various data storage elements 151-153 and virtual data storage elements 154-155 that are available in the data storage subsystem 100. For example, the application "video on demand" may require a high reliability data storage element and fast access to the initial portion of the file, yet not require fast access for the entirety of the file since the data is typically read out at a fairly slow data access rate. However, the required data transfer bandwidth may be large, since the amount of data to be processed is significant and having a slow speed access device as well as a narrow bandwidth would result in unacceptable performance. Furthermore, the cost of data storage is a concern due to the volume of data. The intelligent data storage manager 110 must therefore factor all of these data storage characteristics to determine a best fit data storage device or devices to serve these needs. In this example, the defined data storage characteristics may be partially satisfied by a Redundant Array of Inexpensive Tapes since the reliability of this data storage device is high as is the data bandwidth, yet the cost of implementation is relatively low, especially if the configuration is a RAIT-5 and the data access speed is moderate. In making a determination of the appropriate data storage device, the intelligent data storage manager 110 must review the criticality of the various data storage characteristics and the amount of variability acceptable for that data storage characteristic.

### Defining Attribute Values

All devices support some form of quality of service, which can be described as attributes with certain fixed values. For example, they cost \$xxx per megabyte of data or have nnn access speed. The intelligent storage manager 110 provides an algorithmic way to use these attributes to determine the perfect device, as specified by user policy. In some cases, the perfect device is a logical device that is constructed when the intelligent storage manager 110 rank orders the distance between 1) how the user would like to have data stored and 2) the storage devices that are available. This logical device can span both disk and tape subsystems and, therefore, blurs the distinction between disk and tape.

The diagram of Figure 4 shows an example of a user policy that must resolve priorities between two attributes: Cost per MB, and Time to First Byte. To resolve this, the intelligent storage manager 110 could create a logical device that is the mixture of disk and tape that best conforms to the specific policies the user has requested. In this example, some data could be stored on disk for quick access and some data could be stored on tape for lower cost of storage. Or the intelligent storage manager 110 could create a policy that migrates a small file between disk and tape over time: after a week the file would be transferred to tape to lower storage cost.

Table 2 provides a more complex comparison of device attributes versus attributes defined through user policy. In this example, the set of attributes of the following storage subsystems: single disk, RAID, single tape drive, and RAIT are listed. The intelligent storage manager 110 determines an optimal storage solution by doing a distance calculation between 1) the set of attributes for each device and 2) the set of attributes for a file (defined through user policy).

For example, the calculation below denotes the vector for point P by  $[x_1(P), x_2(P), x_3(P)]$ . Then the distance between points 1 and 2 is

$$\sqrt{[(x_1-x_2)^2+(y_1-y_2)^2+(z_1-z_2)^2]}$$

Where:  $x_1$  is the attribute value defined by user policy.  
 $x_2$  is the attribute value defined for the device.

This example is for three dimensions. To extend it to more dimensions, take the difference between corresponding components of the two vectors, square this difference, add this square to all the other squares, and take the square root of the sum of the squares. Of course, you don't need to do the square root if you're simply looking for the point closest to a give point.

Table 2: Device attributes vs. user-defined policy

Device	Cost/MB	Time to first byte	MB/sec read	MB/sec write	Sequential or Random	Reliability
5 <b>Disk</b>	0.15	12ms	3MB/sec	3MB/sec	5	1
<b>RAID</b>	10.00	6ms	80MB/sec	20MB/sec	3	3
<b>Tape</b>	.001	30sec	5MB/sec	5MB/sec	0	2
<b>RAIT</b>	.005	40sec	20MB/sec	20MB/sec	0	4

## User-defined policy (per attribute)

10 <b>File</b>	.01	1 sec or less	.1 MB/sec or less	.1 MB/sec or less	0	3
----------------	-----	---------------	-------------------	-------------------	---	---

In the present example, the realized data storage device can be a composite device or a collection of composite devices. For example, the video on demand file data storage requirements can be met by the virtual device illustrated in Figure 3.

- 15 The virtual device 300 can comprise several elements 301, 302, each of which itself comprises a collection of physical and/or virtual devices. The virtual device 300 comprises a first device 301 which comprises a set of parallel connected disk drives 310-314 that provides a portion of the data storage capability of the virtual device 300. These parallel connected disk drives 310-314 provide a fast access
- 20 time for the application to retrieve the first segment of the video on demand data to thereby provide the user with a fast response time to the file request. The bulk of the video on demand data file is stored on a second element 302 that comprises a Redundant Array of Inexpensive Tapes device that implements a RAIT-5 storage configuration. The relative data storage capacity of the two data storage elements
- 25 301, 302 is determined by the amount of data that must be provided to the user on a priority basis and the length of time before the remainder of the file can be staged

for provision to the user.

### Time Analysis

The data storage manager 110 implements devices that support some form of quality of service. These attributes have some type of fixed value: they cost so much— they have XX access speed. The data storage manager 110 can also rank order the distances between how the user wishes to have a data file stored compared to the storage devices that are in the data storage subsystem 100. From this the data storage manager 110 can also come up with some alternative storage methods— for example, the data storage manager 110 can do a mixture of disk and tape to achieve the qualities that the user is looking for. The data storage manager 110 can put some of the data file on disk for quick access and some of it on tape for cheap storage as noted above. Another alternative factor is if there is a file that the user wants stored at a certain \$\$ per megabyte, it can be migrated from disk to tape over a certain period of weeks and the average cost of storage complies with the user policy definition. So, the data storage manager 110 must evaluate quickly what devices are available and the data storage manager 110 compares how the user wants to store the data file. If the data storage manager 110 doesn't have a perfect match, the mixtures of devices are rank ordered and investigated to try and achieve the policy that is defined by the user.

### Summary

The intelligent data storage manager functions to combine the non-homogeneous physical devices contained in a data storage subsystem to create a logical device with new and unique quality of service characteristics that satisfy the criteria for the policies appropriate for the present data object. The intelligent data storage manager uses weighted values that are assigned to each of the presently defined logical devices to produce a best fit solution to the requested policies in an n-dimensional best fit matching algorithm. The resulting logical device definition is then implemented by dynamically interconnecting the logical devices that were used as the components of the newly defined logical device to store the data object.

**What is Claimed:**

1. A data storage manager operational in a data storage subsystem that uses a plurality of data storage elements to store data thereon for a plurality of host processors that are connected to said data storage subsystem, comprising:
  - means for storing a set of logical data storage device definitions that are
  - 5 created from said plurality of data storage elements;
  - means for identifying a set of data storage characteristics appropriate for a present data object;
  - means for comparing said identified set of data storage characteristics with said stored set of logical data storage device definitions;
  - 10 means, responsive to a failure to match said identified set of data storage characteristics with a single one of said stored set of logical data storage device definitions, for creating a new logical device definition using a plurality of said stored set of logical data storage device definitions; and
  - means for storing said present data object on interconnected ones of said plurality of data storage elements that correspond to said new logical device definition.
2. The data storage manager of claim 1 wherein said means for creating comprises:
  - means for assigning weighted values to each of the presently defined logical devices to produce a best fit solution to the requested policies in an n-dimensional
  - 5 best fit matching algorithm.
3. The data storage manager of claim 1 wherein said means for creating comprises:
  - means for implementing the resulting logical device definition by dynamically interconnecting the logical devices that were used as the components of the newly
  - 5 defined logical device to store the data object.
4. The data storage manager of claim 1 wherein said means for storing comprises:
  - means for allocating space on an existing instance of said interconnected

ones of said plurality of data storage elements that correspond to said new logical  
5 device definition.

5. The data storage manager of claim 1 wherein said means for storing  
comprises:

means for creating a new instance of said interconnected ones of said  
plurality of data storage elements that correspond to said new logical device  
5 definition.

6. The data storage manager of claim 1 wherein said means for storing  
comprises:

means for storing data indicative of a plurality of data storage attributes from  
the class of data storage attributes comprising: speed of access to first byte, level  
5 of reliability, cost of storage, probability of recall, and expected data transfer rate.

7. A method of operating a data storage manager operational in a data  
storage subsystem that uses a plurality of data storage elements to store data  
thereon for a plurality of host processors that are connected to said data storage  
subsystem, comprising the steps of:

5 storing a set of logical data storage device definitions that are created from  
said plurality of data storage elements;

identifying a set of data storage characteristics appropriate for a present  
data object;

10 comparing said identified set of data storage characteristics with said stored  
set of logical data storage device definitions;

creating, in response to a failure to match said identified set of data storage  
characteristics with a single one of said stored set of logical data storage device  
definitions, a new logical device definition using a plurality of said stored set of  
logical data storage device definitions; and

15 storing said present data object on interconnected ones of said plurality of  
data storage elements that correspond to said new logical device definition.

8. The method of operating a data storage manager of claim 7 wherein said step of creating comprises:

assigning weighted values to each of the presently defined logical devices to produce a best fit solution to the requested policies in an n-dimensional best fit  
5 matching algorithm.

9. The method of operating a data storage manager of claim 7 wherein said step of creating further comprises:

implementing the resulting logical device definition by dynamically interconnecting the logical devices that were used as the components of the newly  
5 defined logical device to store the data object.

10. The method of operating a data storage manager of claim 7 wherein said step of storing comprises:

allocating space on an existing instance of said interconnected ones of said plurality of data storage elements that correspond to said new logical device  
5 definition.


11. The method of operating a data storage manager of claim 7 wherein said step of storing further comprises:

creating a new instance of said interconnected ones of said plurality of data storage elements that correspond to said new logical device definition.




12. The method of operating a data storage manager of claim 7 wherein said step of storing comprises:

storing data indicative of a plurality of data storage attributes from the class of data storage attributes comprising: speed of access to first byte, level of  
5 reliability, cost of storage, probability of recall, and expected data transfer rate.

FIG. 1

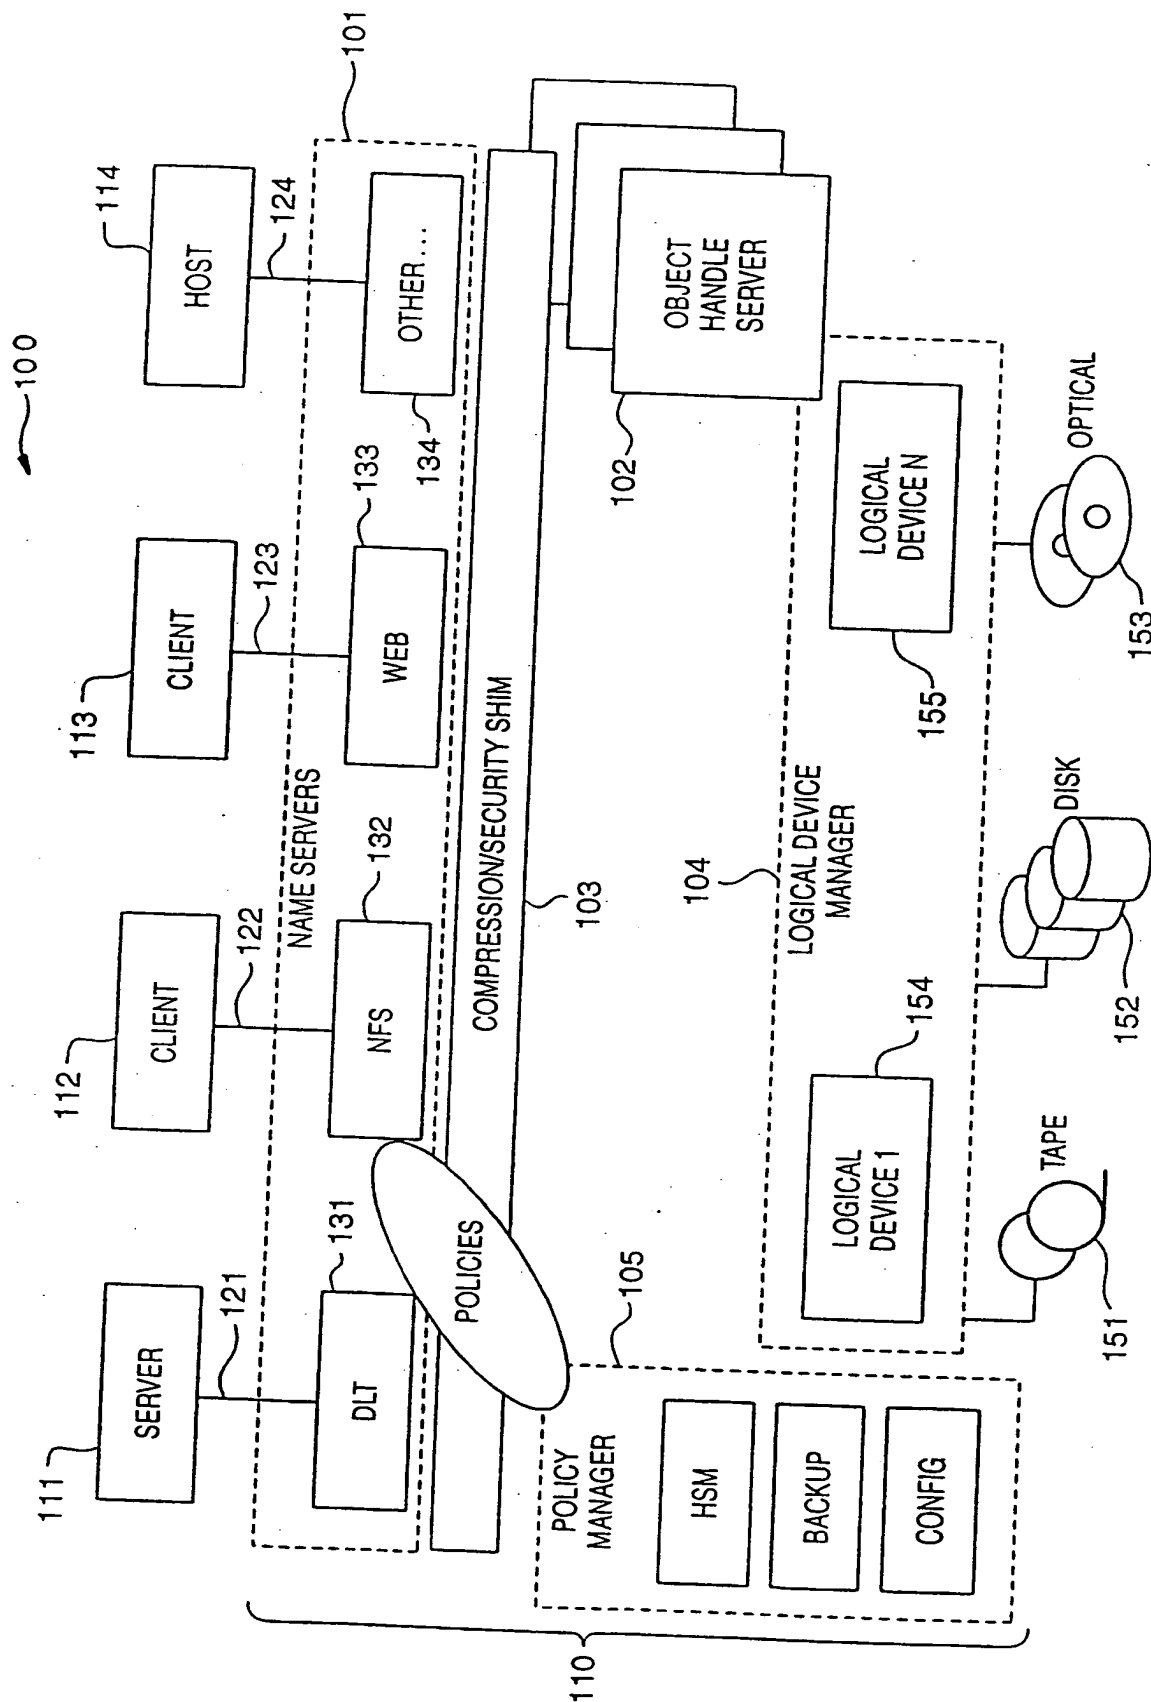

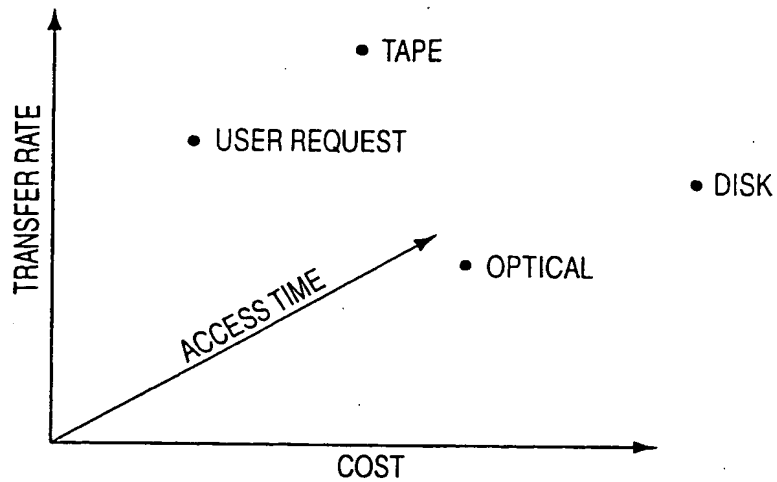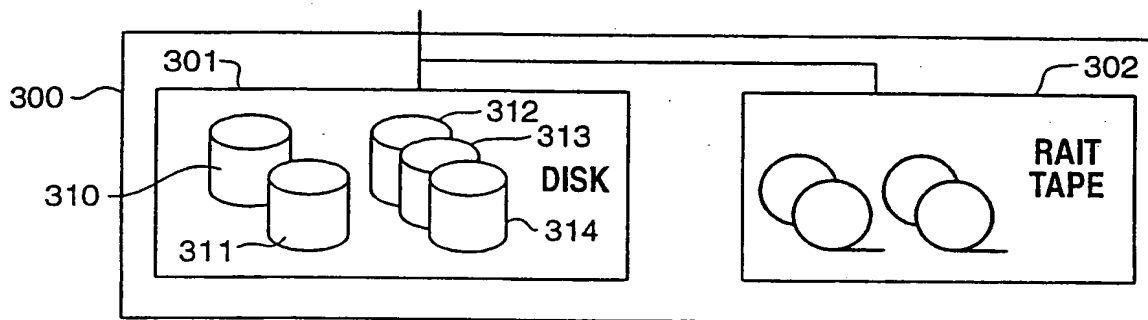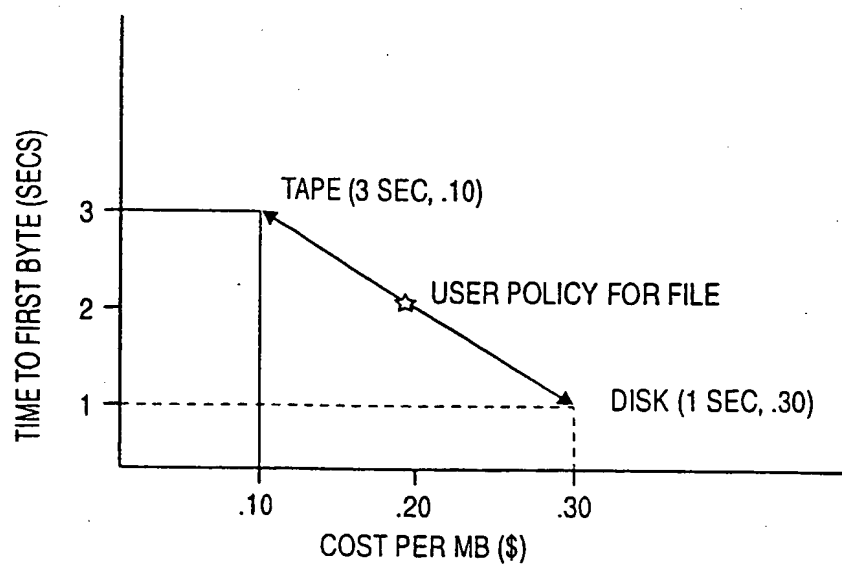

**FIG. 2****FIG. 3****FIG. 4**


**THIS PAGE BLANK (USPTO)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7: <b>G06F 3/06, H04N 7/173</b>		A3	(11) International Publication Number: <b>WO 00/41510</b>
			(43) International Publication Date: 20 July 2000 (20.07.00)
(21) International Application Number: PCT/US00/01052		(74) Agents: BAILEY, Wayne, P. et al.; Storage Technology Corporation, One StorageTek Drive, MS-4309, Louisville, CO 80028-4309 (US).	
(22) International Filing Date: 14 January 2000 (14.01.00)			
(30) Priority Data: 09/232,431 15 January 1999 (15.01.99) US		(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(71) Applicant: STORAGE TECHNOLOGY CORPORATION [US/US]; One StorageTek Drive, MS-4309, Louisville, CO 80028-4309 (US).		Published With international search report.	
(72) Inventors: BAKKE, Mark, Alan; 11738 Gentilly Road, Maple Grove, MN 55369 (US). BLENDERMANN, Stephen, Henry; 1489 Johnson Court, Boulder, CO 80303 (US). HALLADAY, Steven; 1049 Monarch Way, Superior, CO 80027 (US). JOHNSON, Steven, A.; 5678 West 109th Circle, Westminster, CO 80020 (US). LAUGHLIN, Jeffrey, Steven; 315 Forsythe Road- MSR, Nederland, CO 80466 (US). RUDESEAL, George, Arthur; 650 12th Street, Boulder, CO 80302 (US). SCHAFER, Charles, Patrick; 125 Skyview Court, Louisville, CO 80027 (US). WEST, Thomas, David; 990 Parkway Drive, Boulder, CO 80303-2850 (US). WOJNAR, Michael, C.; 2528 Ginny Way, Lafayette, CO 80026 (US).		(88) Date of publication of the international search report: 28 September 2000 (28.09.00)	

(54) Title: INTELLIGENT DATA STORAGE MANAGER

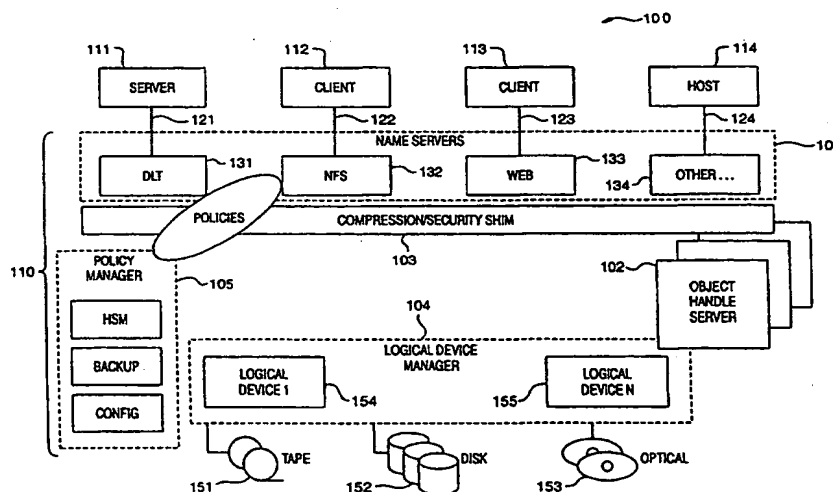

## (57) Abstract

The intelligent data storage manager functions to combine the non-homogeneous physical devices contained in a data storage subsystem to create a logical device with new and unique quality of service characteristics that satisfy the criteria for the policies appropriate for the present data object. In particular, if there is presently no logical device that is appropriate for use in storing the present data object, the intelligent data storage manager defines a new logical device using existing physical and/or logical device definitions as component building blocks to provide the appropriate characteristics to satisfy the policy requirements. The intelligent data storage manager uses weighted values that are assigned to each of the presently defined logical devices to produce a best fit solution to the requested policies in an n-dimensional best fit matching algorithm. The resulting logical device definition is then implemented by dynamically interconnecting the logical devices that were used as the components of the newly defined logical device to store the data object.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/01052

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 G06F3/06 H04N7/173

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 689 125 A (HEWLETT-PACKARD COMPANY) 27 December 1995 (1995-12-27) the whole document	1-12
X	WO 97 07461 A (BORG TECHNOLOGIES) 27 February 1997 (1997-02-27) the whole document	1
A	WO 98 40810 A (STORAGE TECHNOLOGY CORPORATION) 17 September 1998 (1998-09-17) the whole document	1
A	US 5 131 087 A (WARR) 14 July 1992 (1992-07-14) abstract	2



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

26 June 2000

Date of mailing of the international search report

06/07/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Absalom, R

# INTERNATIONAL SEARCH REPORT

Inte: onal Application No

PCT/US 00/01052

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 619 690 A (MATSUMANI ET AL.) 8 April 1997 (1997-04-08) ---	
A	US 5 829 046 A (TZELNIC ET AL.) 27 October 1998 (1998-10-27) -----	

# INTERNATIONAL SEARCH REPORT

information on patent family members

Int. Patent Application No

PCT/US 00/01052

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 689125 A	27-12-1995	JP 8044503 A	16-02-1996
		US 5696934 A	09-12-1997
WO 9707461 A	27-02-1997	US 5657468 A	12-08-1997
		CA 2229639 A	27-02-1997
		EP 0850448 A	01-07-1998
WO 9840810 A	17-09-1998	EP 1008051 A	14-06-2000
US 5131087 A	14-07-1992	AU 628911 B	24-09-1992
		AU 4829290 A	01-08-1990
		CA 2006836 A,C	29-06-1990
		EP 0451196 A	16-10-1991
		JP 4502527 T	07-05-1992
		WO 9007746 A	12-07-1990
US 5619690 A	08-04-1997	JP 7073090 A	17-03-1995
US 5829046 A	27-10-1998	US 5948062 A	07-09-1999
		AT 184742 T	15-10-1999
		AU 7522296 A	15-05-1997
		DE 69604299 D	21-10-1999
		DE 69604299 T	30-12-1999
		EP 0857390 A	12-08-1998
		JP 11514171 T	30-11-1999
		WO 9716023 A	01-05-1997
		US 5933603 A	03-08-1999
		US 5737747 A	07-04-1998

THIS PAGE BLANK (USPTO)